

**JCB**

SAFETY FOOTWEAR

**SAFETY****TREKKER S1****Breathable Leather Ankle Safety Boot**

Trekker is our iconic & stylish leather safety boot, offering very high wearer comfort, high breath ability, highest slip resistance. Thanks to its lightweight design incorporating tropicalized high-tech materials, and ergonomically designed out sole. Trekker the ideal companion for the 24X7 working.

Upper	Beige Nubuck leather
Sole	Double Density PU Grey Outsole
Toecap	Steel
Midsole	PU
Lining	Two Colour Mesh
Footbed	EVA Footbed
Safety category	EN ISO 20345:2011 & IS 15298 (Part 2): 2016
Sample weight	925 gm. ± 50g.   Size 8.
Size range	UK 5-12

**BORN TOUGH  
BUILT RELIABLE****GENERAL & UPPER**

ANKLE BOOT



LEATHER UPPER



LIGHT WEIGHT

BREATHABLE  
UPPER

LACE UP



ODOR REDUCING

**TOE CAP**

STEEL TOE



WIDE TOE CAP

**LINING**

TEXTILE LINING

**IN SOCK**AERATION HOLES  
TO REGULAR  
TEMPERATURECUSHION HEEL &  
ARCH SUPPORT**SOLE**

DOUBLE DENSITY



ABSORPTION



RESISTANT SOLE



ANTISTATIC



RESISTANT



SLIP RESISTANT

**JCB**

SAFETY FOOTWEAR

info@jcbfootwear.in  
www.jcbfootwear.in

INDUSTRIAL PROFESSIONAL OCCUPATIONAL

ENGINEERED  
IN UKIS 15298  
(PART 2)  
CM/L-4867488



**JCB**

SAFETY FOOTWEAR



**SAFETY**

## TREKKER S1

### Industries:


General, Engineering, Automobile, Construction

### Environments:

Dry environment, Extreme slippery surfaces, Uneven surfaces, upto 130° c

### Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator/Hair Dryer nor nearby a heat source.

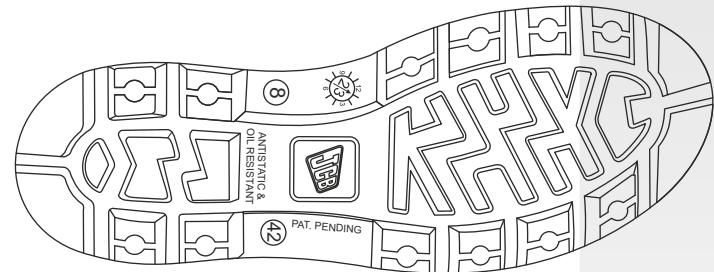

Description		Measure unit	Result	IS 15298(Part 2):2016 EN ISO 20345
Upper Leather	Upper: Tear Strength	n/mm <sup>2</sup>	262	≥ 120
	Upper: Tensile Strength	n/mm <sup>2</sup>	26	≥ 15
	Upper: permeability to water vapor	mg/cm <sup>2</sup> /h	1.6	≥ 0.8
	Upper: water vapor coefficient	mg/cm <sup>2</sup>	19.6	≥ 15
Lining	3D-Mesh			
	Lining: permeability to water vapor	mg/cm <sup>2</sup> /h	31.1	≥ 2
	Lining: water vapor coefficient	mg/cm <sup>2</sup>	180	≥ 20
	Lining: abrasion resistance	25,600 Cycles	no hole	no hole
Footbed	Footbed			
	Footbed: abrasion resistance	cycles	450	≥ 400
Outsole	SOLE:PUPU			
	Outsole abrasion resistance (volume loss)	mm <sup>3</sup>	91	≤ 150
	Flexing resistance (30,000 cycles)	mm	no growth	≤ 4
	Upper outsole bond strength	n/mm	4.15	≥ 4.0
	Interlayer bond strength	n/mm	4.05	≥ 4.0
	Outsole slip resistance SRA: heel	friction	0.41	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.39	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.17	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.18	≥ 0.18
	Antistatic value	MegaOhm	125	0.1 - 1000
	Heel energy absorption	Joules	≥ 30	≥ 20
	Resistance fuel oil	%	≤ 1.6	≤ 12
	Hot Contact at 130°C for 1 min.	Centigrade	No melt	No melt
Toecap				
	Impact resistance toecap (clearance after impact 200J)	mm	19.0	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	14.7	≥ 14

Our shoes are constantly evolving, the technical data above may change. All product names and brand JCB, are registered and may not to be or reproduced in any format, without written consent from us.

**JCB**

SAFETY FOOTWEAR

info@jcbfootwear.in  
www.jcbfootwear.in

INDUSTRIAL PROFESSIONAL OCCUPATIONAL

ENGINEERED  
IN UK



IS 15298  
(PART 2)  
CM/L-4867488